


VEGA 8000DI

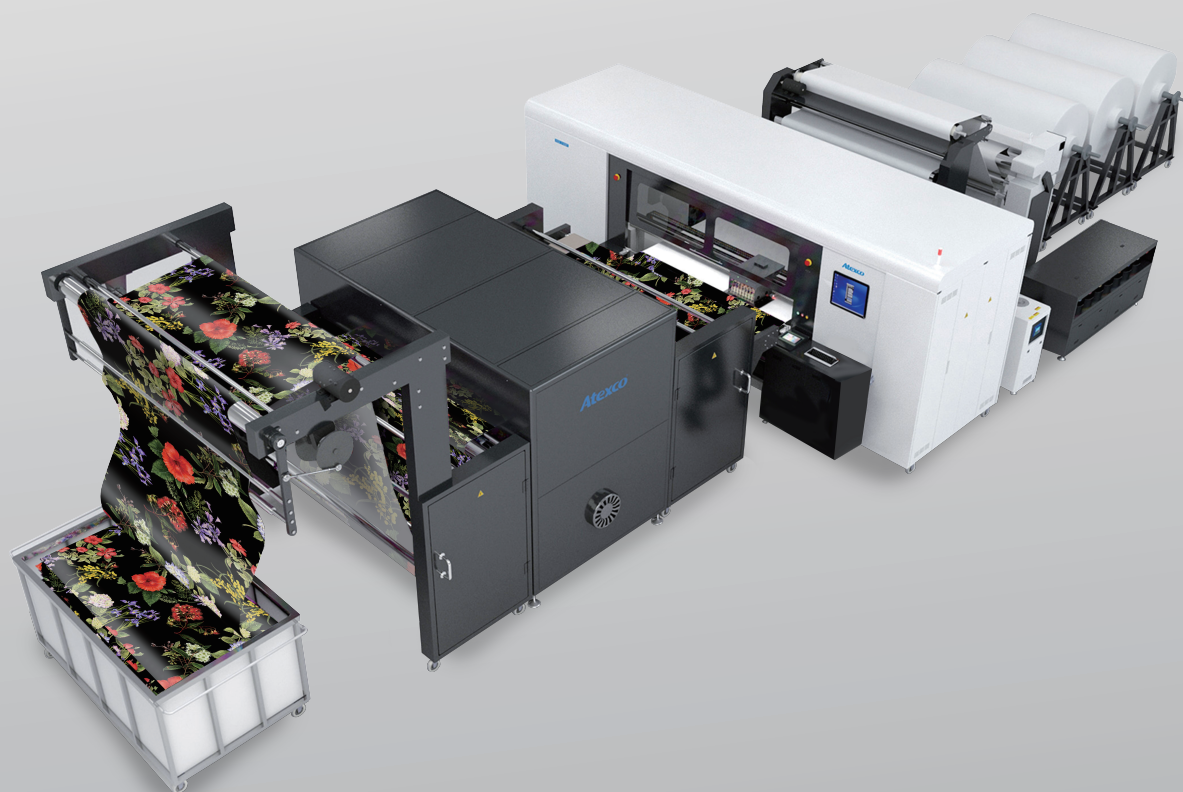

HIGH SPEED INDUSTRIAL DIGITAL TEXTILE PRINTER

24-hour Printing
Daily Output: 10000–12000m

Vivid Color
Exquisite Sharpness Gives Perfect Clarity
Suitable For All Fabric Types

Linear Motor Rail Beam
World's Top Brand Components

Degassing System Reduces Print Head Clogging
Higher Ink Concentration More Economical
Intelligent Output And Ink Consumption Management

Focusing on textile industry for 30 years, Atexco is together with you forever.

VEGA 8000DI Specification

Model		VEGA8180DI		VEGA8250DI	VEGA8320DI
Printing Technology		Industrial DOD Piezo Printing			
Max. Printing Width		1820 mm		2600 mm	3200 mm
Printing Heads and Quantity		32	48	32	32
Printing Mode	Speed Testing Width	1.5 m		2.6 m	3.2 m
	Mode 1 (600 1 Pass)	480 m/h	480 m/h	280 m/h	250 m/h
	Mode 2 (600 2 Pass)	270 m/h	270 m/h	160 m/h	140 m/h
	Mode 3 (600 3 Pass)	180 m/h	180 m/h	110 m/h	90 m/h
Print Heads		Industrial Kyocera Heads			
Color Configuration		8 colors/12 colors/double 6 colors			
Ink System	Ink Type	Reactive/Disperse/Acid/Sublimation			
	Ink Colors	C M Y K O B MB LK LM LC MF YF			
	Suitable Fabric	Woven & Knitted Cotton, Viscose, Rayon, Linen, Silk, Polyester, Nylon and other new developed fiber fabric			
Operation Interface		Touching Screens in Front and Rear of the Printer			
Computer System		WIN 10 7090MT I7-11700/64G/1T/64 bit			
Software	Server Software	VEGA Print RIP Software			
	Rip Software	AT Sample and Other Party Softwares Supported			
Image Format		File Format: JPEG/TIF/BMP; Color Format: RGB/CMYK			
Language		Chinese/English			
Printer Features		Ink Cooling System for Long Print Head Lifespan Multiple Belt Cleaning with Wiper, Sponge Roller & Brush Roller Built-in Fabric Centering System for Woven & Knitted Fabric Auto Feeding Ink Mist Filtering System for Long Print Heads & Electrical Parts Lifespan			
Optional Dyers		Single & double chamber super dryer heated by electricity, steam, gas or thermal oil			
Environment	Power Supply	AC380V(3 Phase/5 Wires), 50 HZ/60 HZ			
	Compressed Air	Air flow \geq 0.6m ³ /min, Pressure \geq 8kg			
	Temperature & Humidity	22°C-28°C & 55%-70%			
Power Consumption		20 kW			
Printer Installation Size		15000*5000*3000mm	15000*6000*3000mm	15000*7000*3000mm	
Weight		4000kg	4500kg	5000kg	

The parameters above are subject to change without notice (2023.03)